

This document is the property of High-Top Precision and is delivered on the express condition that it is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than High-Top Precision without its prior consent, and that no right is granted to disclose or to use any information in this document.

RoHS

Customer Drawing

REVISIONS

SYM	ECN No.	DATE	ISSUED
A	-----	2011.12.30	Mac.qu
B	EN-120523	2012.05.29	Chen

NOTES:

Housing: High Temperature Thermoplastic
Contact: Phosphor Bronze
Shell: Brass

PLATING:

Shell: Plated Nickel 80u" Min Allover.
Contact: Plated Au On Contact Area,
Matte Tin 150u" Min On Other Area, Nickel
80u" Min Under Allover.

ELECTRICAL CHARACTERISTICS:

Temperature Range : -20° C to +85° C
Voltage Current Rating : 1AMP.30V AC
Insulation Resistance : 100M OHM Min
Contact Resistance : 50m OHM Max
Dielectric Withstanding Voltage : 100V AC

MECHANICAL:

Mating Force: 3.57 KG MAX
Unmating Force: 0.7 KG MIN.


PACKING P/N: PUN00511-30002

ORDERING INFORMATION:

1: Finished product
Series code UN: MINI USB
Shape code 0: Female
Terminal digital 05: 5PIN
Environmental code 1: RoHS
Variation code
Plating: 12: Au 1u"/Matte-Tin
62: Au 30u"/Matte-Tin
Pin code 3: DIP
Packing code 1: tray

OLD P/N: UB211S05A32 (Au30u")

DRAWN Chen	HIGH-TOP High-Top Precision Electronic Co., Ltd			
CHECKED <i>Jacky</i>	TITLE MINI USB 5P/F B TYPE DIP		PART NO. 1UN00511-36202	
APPROVED			DRAWING NO. 1UN005XX-3XX02	
3rd ANGLE PROJECTION	UNIT MM	TOLERANCE .XXX±.10, .XX±.25, .X±.38, ANG±5°	SCALE 1:1	SHEET 1 OF 1
			SIZE A4	REV. B

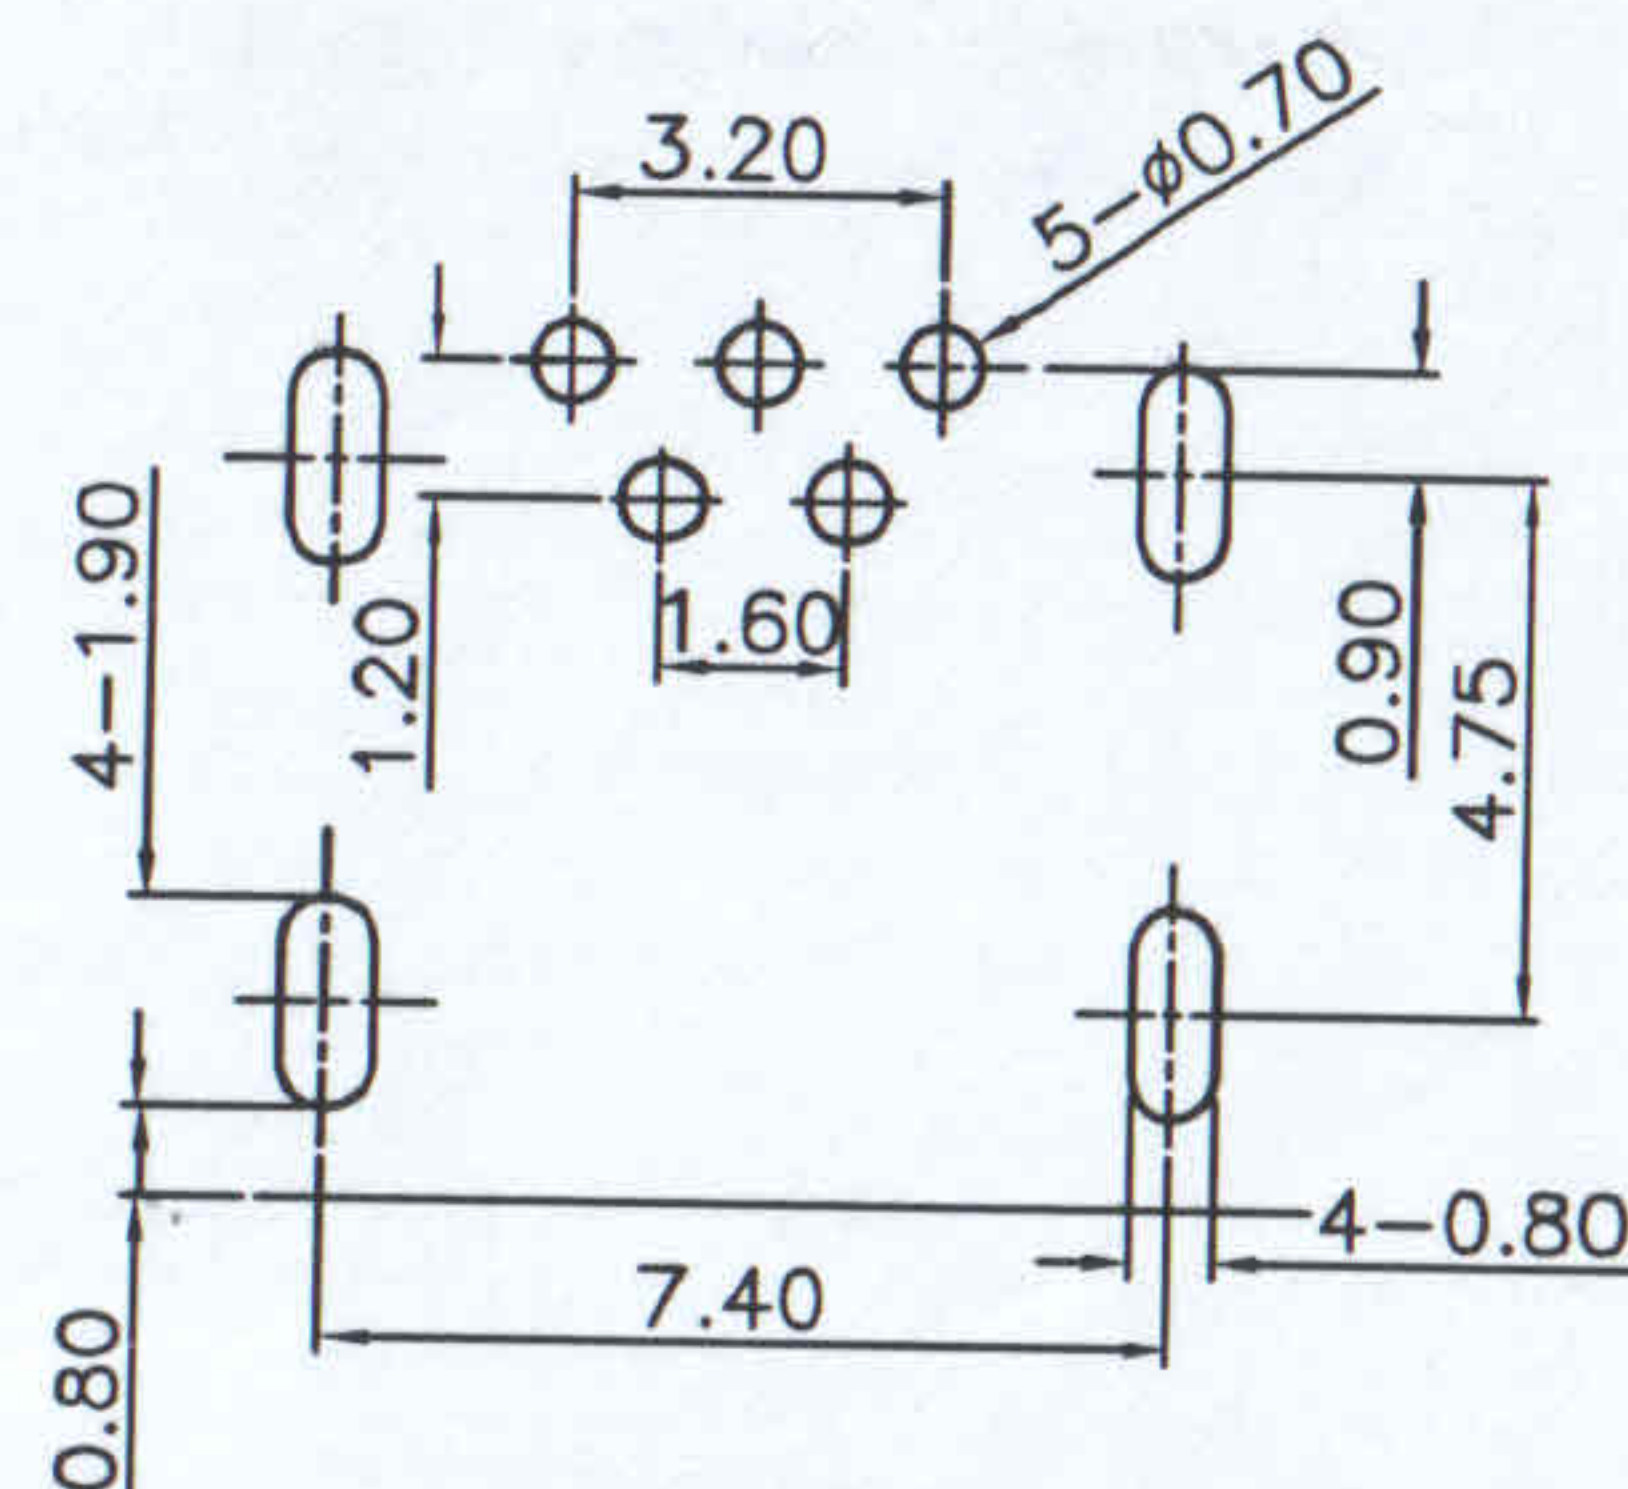

RECOMMENDED PCB LAYOUT
TOP VIEW (TOLERANCE: ±0.05)

