
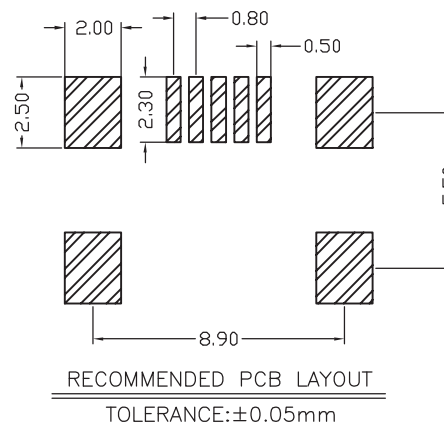


This document is the property of High-Top Precision and is delivered on the express condition that it is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than High-Top Precision without its prior consent, and that no right is granted to disclose or to use any information in this document.

RoHS

Customer Drawing

REVISIONS			
SYM	ECN No.	DATE	ISSUED
X1	-----	2011.12.13	Lynn-luo

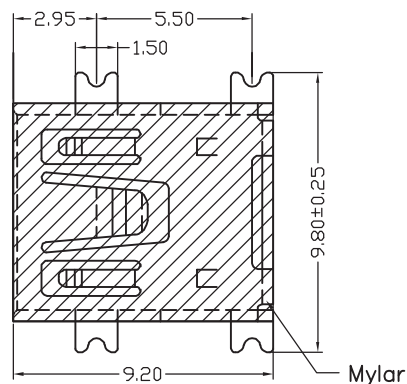

NOTES:

Housing: High Temperature Thermoplastic
Contact: Phosphor Bronze
Shell: Brass

PLATING:

Shell: Plated Nickel 80u" Min Allover.
Contact: Plated Au On Contact Area, Matte
Tin 100u" Min On Other Area, Nickel
50u" Min Under Allover.

ELECTRICAL CHARACTERISTICS:






Temperature Range: -20° C to +85° C
Voltage Current Rating: 1AMP, 30V AC
Insulation Resistance: 1000M OHM Min
Contact Resistance: 30m OHM Max
Dielectric Withstanding Voltage: 500V AC

Mechanical:

Mating Force: 3.5 KG MAX
Unmating Force: 0.7 KG MIN.

ORDERING INFORMATION:

PRODUCT NAME: **UB 211 S 05 A 43**
MINI USB CONNECTOR
MODLE
SINGLE LAYER
SOCKET
FOLLOW NO
PLATING
A= Au 30u"
5 CIRCUITS

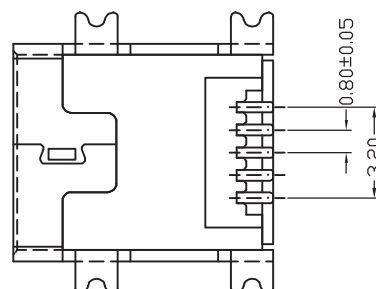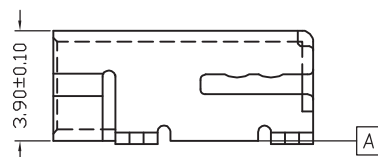

DRAWN Lynn Liu	HIGH-TOP High-Top Precision Electronic Co., Ltd			
CHECKED Jacky.zhuang	TITLE MINI USB 5P/F B TYPE SMT		PART NO. UB211S05A43	
APPROVED			DRAWING NO. C-UB211S05X43	
	UNIT	TOLERANCE		SCALE
	MM	.XXX±.10, .XX±.25, .X±.38, ANG±5°		1:1
		SHEET	SIZE	REV.
		1 OF 1	A4	X1